



Series	FS	Warranty	1 Year
Volts	6	BCI	902
Cells	3	Plates/Cell	15
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	738
Marine Crank Amps (MCA) 32°F / 0°C	923
Reserve Capacity (RC @ 25A)	590 Minutes
Reserve Capacity (RC @ 75A)	155 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>390 AH</b>	<b>3.90 A</b>
@ 72 Hour Rate	<b>384 AH</b>	<b>5.34 A</b>
@ 50 Hour Rate	<b>363 AH</b>	<b>7.26 A</b>
@ 20 Hour Rate	<b>305 AH</b>	<b>15.25 A</b>
@ 15 Hour Rate	<b>290 AH</b>	<b>19.32 A</b>
@ 10 Hour Rate	<b>268 AH</b>	<b>26.84 A</b>
@ 8 Hour Rate	<b>262 AH</b>	<b>32.79 A</b>
@ 5 Hour Rate	<b>241 AH</b>	<b>48.19 A</b>
@ 1 Hour Rate	<b>122 AH</b>	<b>122 A</b>

Ampere hour capacity ratings based on specific gravity of 1.280 at 25°C (77°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications

Certified System




SAI GLOBAL  
ISO 9001  
Quality

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Weight	41 kg	90.5 lbs
Length	31.1 cm	12.25"
Width	18.1 cm	7.13"
Height Inc. Term.	36.2 cm	14.25"
Electrolyte Reserve	44 mm	1.75"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Rope / Plastic Handle	

### Cycle Life vs. Depth of Discharge

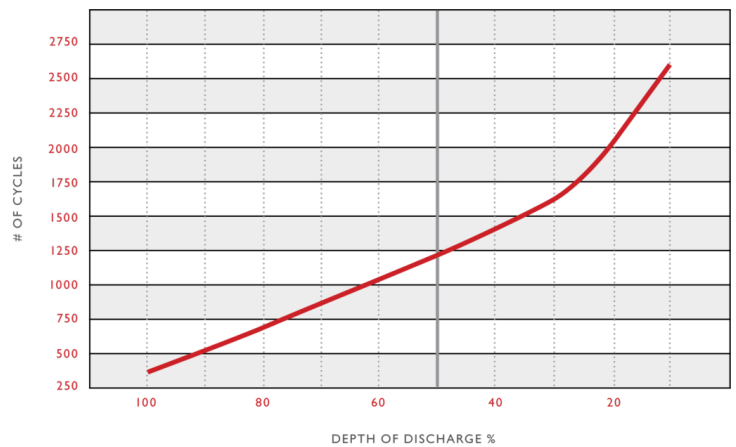

### Voltage vs. Depth of Discharge

